


## Overview


The simple to install Paxton10 Reader Converter will allow for an easy upgrade path between Net2 and Paxton10, enabling the existing Net2 readers to be used with a Paxton10 system.

The Converter also allows the use of third-party Clock and Data, and Wiegand Readers/Keypads with the Paxton10 Door Controller or Paxton10 Video Controller.

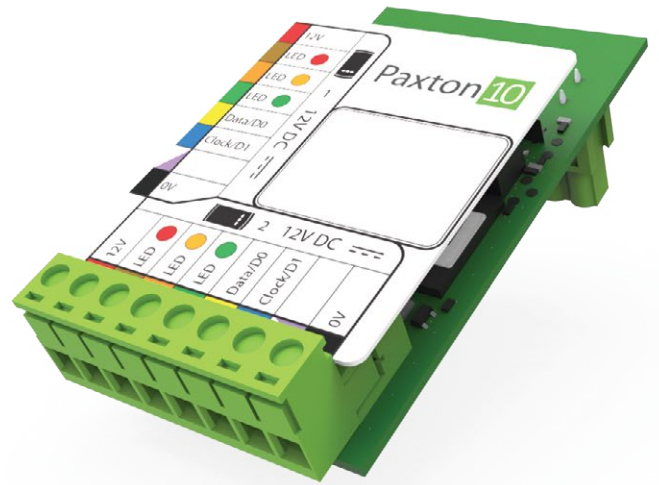

## Features

- Adds support of Paxton Net2 Readers, Proximity, Keypad and Keypad Proximity
- Adds support for Third Party Clock and Data Readers
- Adds support for Wiegand Readers and Keypads (coming soon)
- Simple installation to either a Paxton10 Door Controller or Paxton10 Video Controller

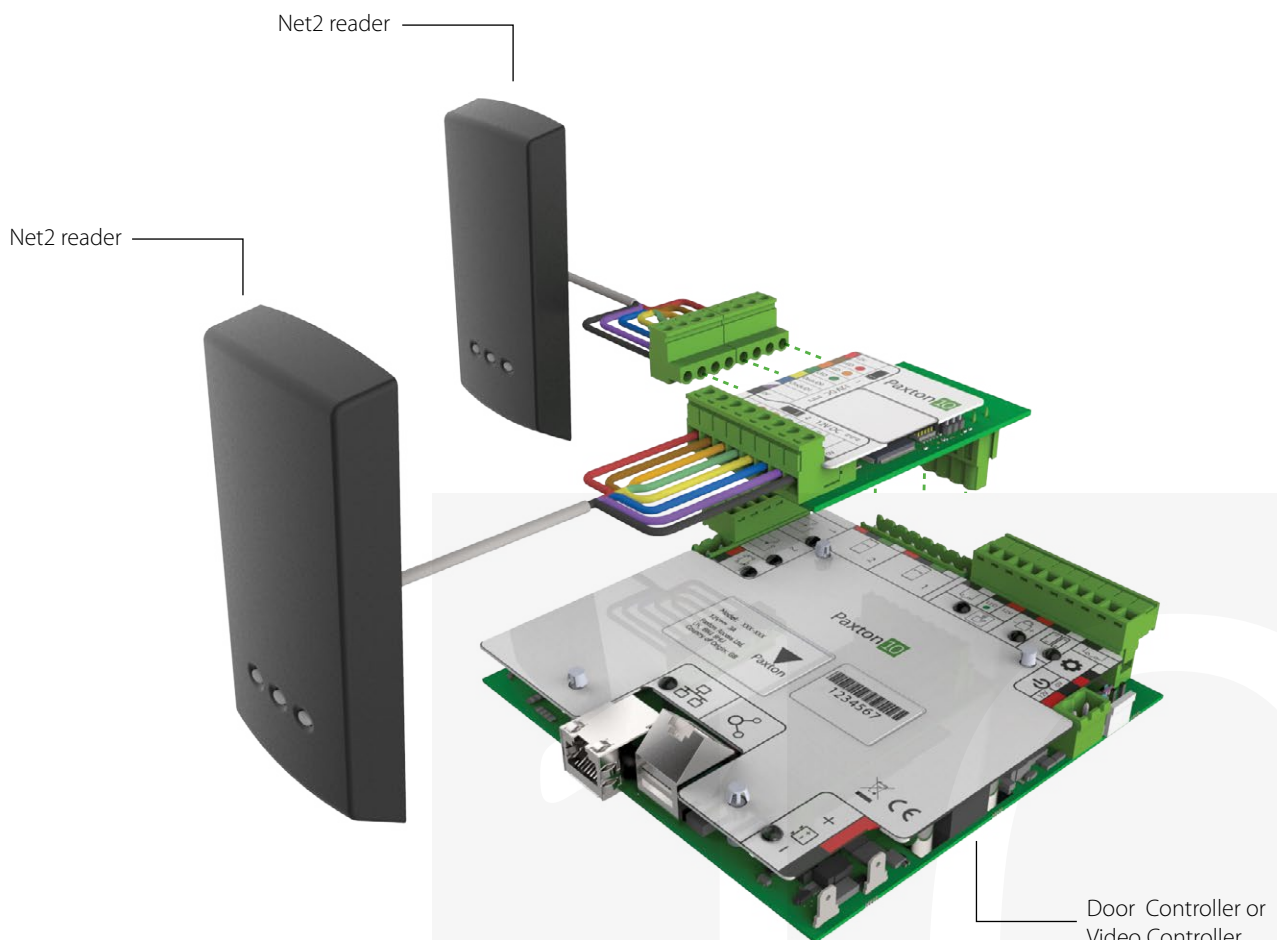



## Electrical

Power consumption	300mA (Max)
Power supply to readers	12V dc 100mA



## Communication

Data connection to controller	RS485
Data connection to readers	Wiegand / Clock & Data



## Hardware

Dimensions (W x H x D)	47mm x 87mm x 29mm
Number of reader connections	2 Only
Warranty	Paxton 5 year



## Environment

Operating temperature	Internal Only 0°C - 45°C
-----------------------	-----------------------------

