



S922

Waterproof, Dustproof and Shockproof Portable Fingerprint Time & Attendance Terminal

The S922 is specifically designed for off-site time management, such as construction sites, logistic industries, large farms, and the mining industry. Top handle with rubber coating enables users to carry easily

- Built-in 7600 mAh backup battery extends extra operation time
- IP65 rated waterproof and dustproof protection grade
- Shock proof (0.5m above the ground) with unique rubber coating
- Communication: TCP/IP, USB-host, Optional: Wi-Fi, GPRS and 3G (WCDMA)
- Multiple authentications: support fingerprint, ID card or Mifare card
- Fingerprint Capacity: 5, 000 (Standard)/10,000 (Optional)
- Card Capacity: 30,000



IP65



Rugged Enclosure



GPRS/3G



Fingerprint



RFID




Backup Battery




Specifications

| | |
|-----------------------|--|
| Display | 3.5-inch TFT Screen |
| Fingerprint Capacity | 5, 000 (Standard)/10,000 (Optional) |
| Card Capacity | 30,000 (ID Card) |
| Transaction Capacity | 200,000 |
| Fingerprint Sensor | ZK Optical Sensor |
| Algorithm Version | ZKFinger VX10.0 |
| Communication | TCP/IP, USB-host, Wi-Fi |
| Standard Functions | ADMS, Work-code, DST, Self-Service Query, Automatic Status Switch, T9 Input, Photo-ID, 9 Digit User ID, Short Message, ID Card |
| Optional Functions | Mifare Card / GPRS |
| Protection Grade | IP65 |
| Power Supply | 12V 3A DC; Built-in Backup 7600 mAh Battery |
| Operating Temperature | 0 °C- 45 °C |
| Operating Humidity | 20%-80% |
| Net weight | 1.65kg |
| Dimension | 225 x235x125(mm) HxWxD |

Configuration

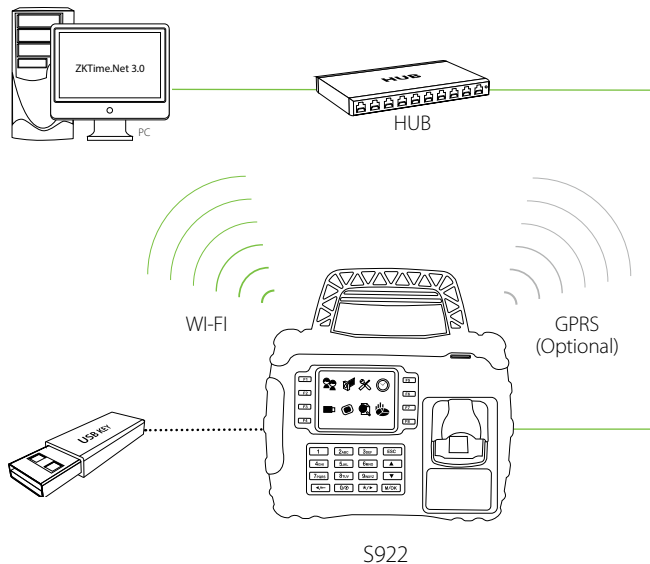

What's in the Box



ZKTeco South Africa
www.zkteco.co.za
sales@zkteco.co.za

© Copyright 2014. ZKTeco Inc. ZKTeco Logo is a registered trademark of ZKTeco or a related company. All other product and company names mentioned are used for identification purposes only and may be the trademarks of their respective owners. All specifications are subject to change without notice. All rights reserved.

