


HD ANALOG IR DOME CAMERA VARI-FOCAL LENS


DI-350AVF



MODEL	DI-350AVF
Image Sensor	1/2.7" CMOS
Image Format	5MP - 4:3 / 4MP - 16:9
Effective Pixels	2592(H)×1944(V)
Scanning System	Progressive
Resolution	5MP: 2592x1944 @ 20FPS, 4MP: 2560x1440 @25/30FPS
Min. Illumination	0.01Lux (0 Lux with IR on)
Day & Night	True Day&Night (ICR)
IR LED	3 LED Array (25m)
OSD Menu	Available via CoC Only
CoC Support	Yes
Day & Night Mode	EXT, Color, B&W, Auto
Backlight Compensation	Off / BLC
S/N Ratio	≥35dB (AGC Off)
White Balance	ATW, Manual
Noise Reduce	2D-DNR
Video Output	5MP / 4MP (Selectable by OSD Menu) AHD/TVI/CVI (4MP Only)/ CVBS + PAL/NTSC (Selectable by DIP Switch on cable)
Defog	Not Available
Privacy Mask	Not Available
Motion Detection	Not Available
D-Effect	Mirror
Lens (Field of View)	2.8-12mm (91°-25°)
Power	DC12V±10%, ~360mA
Operation Temp.	-30°C~+50°C
Waterproof	IP66
Dimension	129.5*119*104mm
Net weight	476g

Main Features:

- Sensor: 1/2.7", 5 Mega-Pixel
- Selectable Output:
 - 5MP: AHD / TVI
 - 4MP: AHD / CVI / TVI
 - CVBS
 - PAL/NTSC
- Lens: 2.8-12mm Mega-Pixel Vari-Focal
- True Day & Night – ICR
- IR Range: 25m (3 Array LED)
- IP66
- CoC Support
- Weight: 476g

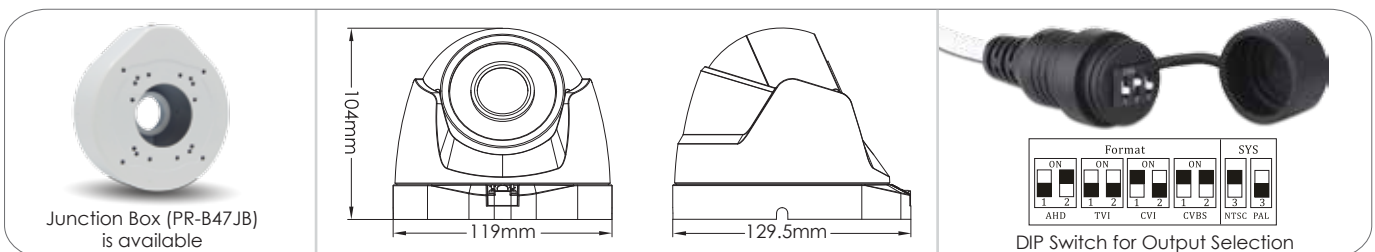

Junction Box (PR-B47JB) is available

DIP Switch for Output Selection