



BAT-12VALK

SCW BATTERY - 12V ALKALINE REMOTE


| | | | | |
|--|---|----------|-------|---------|
| Type | : Alkaline High Voltage Battery | | | |
| Chemical System | : Zinc / Manganese Dioxide | | | |
| Nominal Voltage | : 12V | | | |
| Nominal Dimension | : \varnothing 7.7 X 28.0mm | | | |
| Terminal | : Nickel plated flat contacts - protruded red (+); recessed black (-) | | | |
| Jacket | : Metal jacket | | | |
| Internal Connection | : Pressure | | | |
| Applications | : Remote controller | | | |
| Average Weight | : 4.4g | | | |
| Date Code | : Every battery will carry a numeric year code and an analogue month code changing bi-monthly. Year code 0 for 2000, 1 for 2001, etc. | | | |
| Shelf Life | : Not less than 95% of service life for 1 year storage at 20°C; Not less than 85% of service life for 3 year storage at 20°C | | | |
| Insulation Resistance | : 5 M Ω min. | | | |
| Close Circuit Voltage | : 10.5V (min.) (load resistor 1.6 k Ω at 20°C for 0.1 to 2 seconds) | | | |
| Current Drain | : Under 5mA pulse, 0.5mA continuous | | | |
| Nominal Capacity (to 6.0V at 20°C) | : 20 mAh (at 20 k Ω load) | | | |
| Average Service Life (to 6.0V at 20°C) | : 38 hrs (at 20 k Ω load) | | | |
| Cross Reference | : | | | |
| GP | Duracell | Eveready | Varta | Bronica |
| 27A | -- | -- | -- | B1 |

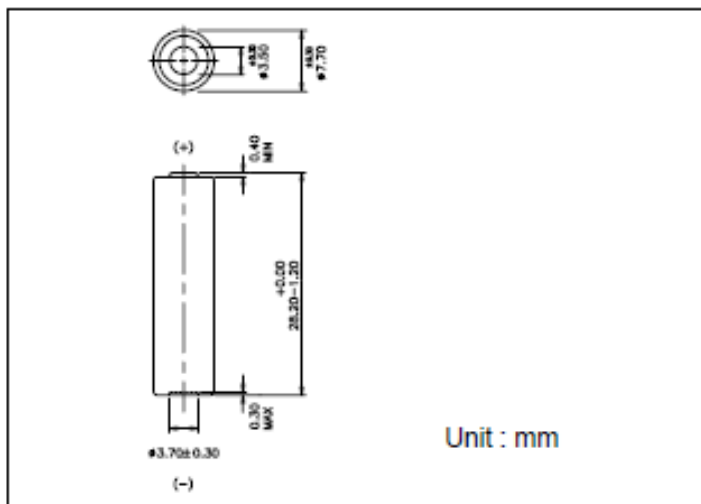

Normal Rate Discharge

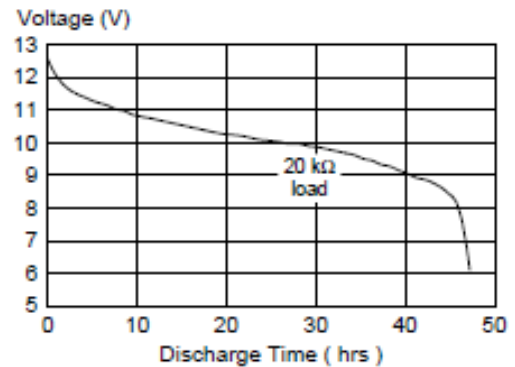

High Rate Discharge

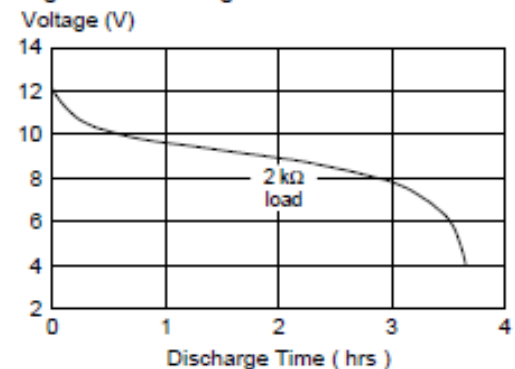

* The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors.