

## iDS-96000NXI-I16(B) DeepinMind Series NVR

### Key Feature

- Intelligent analytics based on deep learning algorithm
- Up to 64/128-ch network camera input for iDS-96064/96128NXI-I16(B)
- Up to 512 Mbps incoming and outgoing bandwidth for iDS-96128NXI-I16(B)
- Up to 20-ch@1080p decoding capability
- 16 SATA interfaces (up to 10 TB capacity for each HDD)
- HDD hot swapping with RAID 0/1/5/6/10
- Redundant power supply
- 7-inch LCD touch-screen for iDS-96128NXI-I16(B)
- H.265+/H.265/H.264+/H.264 self-adaptive video formats



### Profession and Reliability

- H.265+ compression effectively reduces the storage space by up to 75%
- Adopt professional embedded hardware (Intel® processor) and software, and pioneering dual-OS design to ensure the reliability of system running.
- Redundant power supply ensures system stability
- ANR (Automatic Network Replenishment) technology enhances storage reliability when network exception occurs

### Video and Storage

- Compatible with third-party network cameras, such as ACTI, Arecont, AXIS, Bosch, Brickcom, Canon, ONVIF, PANASONIC, Pelco, SAMSUNG, SANYO, SONY, Vivotek and ZAVIO
- 16 SATA interfaces (up to 10 TB capacity per HDD), 1 eSATA interface and 2 miniSAS interfaces (for iDS-96128NXI-I16(B)) provided for HDD connection



## Network & Ethernet Access

- 4 self-adaptive 10M/100M/1000M Ethernet interfaces
- Hik-Connect & DDNS (Dynamic Domain Name System) for easy network management
- 4 gigabit Ethernet SFP fiber interfaces for iDS-96128NXI-I16(B)

## Live view and Playback

- Up to 20-ch@1080p decoding for live view
- Up to 16-ch synchronous playback at 1080p resolution
- Simultaneous HDMI 1/HDMI 2 output as main output and VGA works as auxiliary output
- Dual 4K (4096 × 2160) HDMI outputs


## Application and Management

- Centralized management of network cameras, including configuration, information import/export, real-time information display, two-way audio, upgrade, etc.
- Configurable network camera smart functions, such as VCA detection (motion, line crossing, intrusion, etc.), heat map, ANPR, and people counting
- Deep learning based video analytics for false alarm reduction, facial recognition and face picture comparison
- VCA search for facial detection, false alarm reduction, people counting and heat map

## Typical Application


### Facial Recognition and Face Picture Comparison

Modeling and analyzing face pictures captured by cameras. Realize blacklist alarm and stranger alarm via face picture library. Search target people by picture and name features.

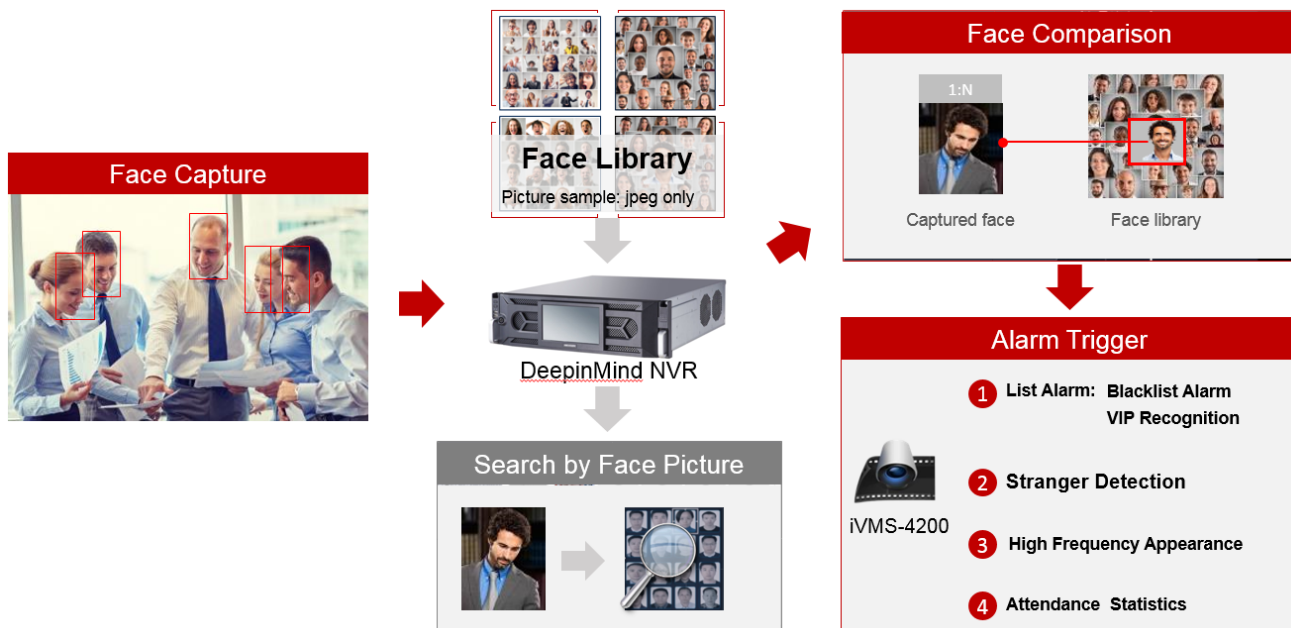

## False Alarm Reduction

Adopt deep learning algorithm to reduce false alarm, effectively reduces the false alarm caused by tree branches, leaves, shadow, light, vehicles, small animals, etc.

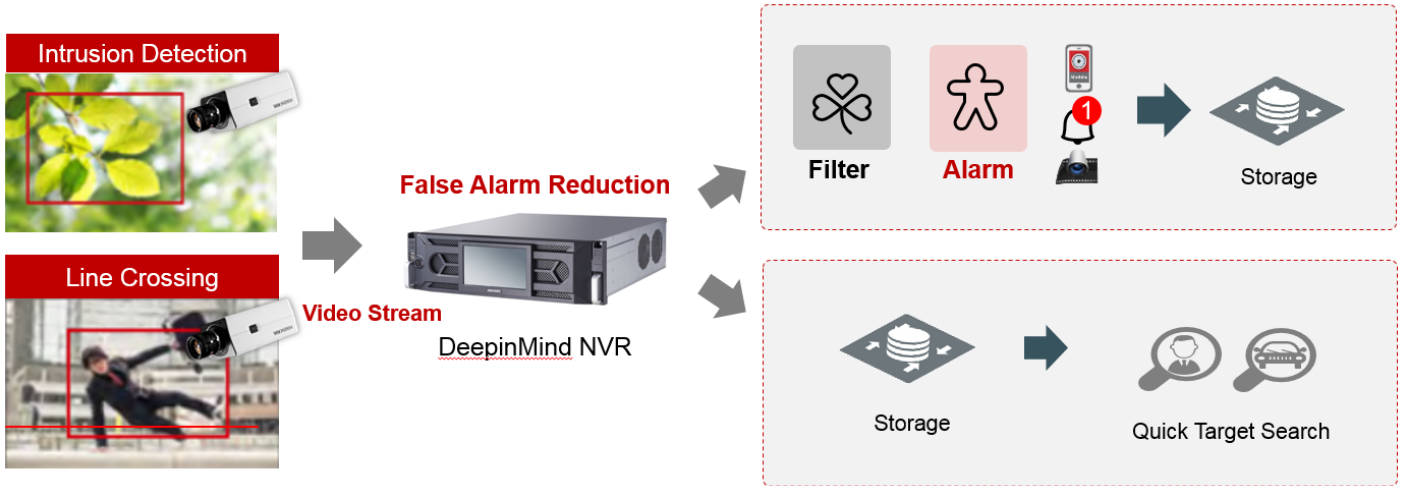






## Specification

Model	iDS-96064NXI-I16(B)	iDS-96128NXI-I16(B)
<b>Smart Analysis</b>		
<b>Facial detection and analytics</b>	Face picture comparison, human face capture, face picture search	
<b>Face picture library</b>	Up to 32 face picture libraries, with up to 300,000 face pictures in total	
<b>Face picture comparison</b>	24-ch face picture comparison alarm	48-ch face picture comparison alarm
<b>Performance of facial detection and analytics</b>	12-ch human face capture (HD network camera, up to 4 MP, H.264/H.265)	24-ch human face capture (HD network camera, up to 4 MP, H.264/H.265)
<b>Human/Vehicle Analysis</b>		
<b>False alarm reduction</b>	Up to 48-ch 2 MP (H.264/H.265) video analysis for human and vehicle recognition to reduce false alarm	Up to 96-ch 2 MP (H.264/H.265) video analysis for human and vehicle recognition to reduce false alarm
<b>Video and Audio</b>		
<b>IP video input</b>	64-ch	128-ch
	Up to 12 MP resolution	
<b>Incoming/outgoing bandwidth</b>	400 Mbps/400 Mbps	512 Mbps/512 Mbps
<b>VGA output</b>	1-ch, 1920 × 1080/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz	
<b>HDMI output</b>	2-ch independent HDMI interface, 4K (4096 × 2160)/30Hz, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz	
<b>LCD output</b>	N/A (7-inch LCD optional)	7-inch LCD
<b>Audio input</b>	1-ch, RCA (2.0 Vp-p, 1 KΩ)	
<b>Audio output</b>	1-ch, RCA (2.0 Vp-p, 1 KΩ)	
<b>Two-way audio input</b>	1-ch, RCA (2.0 Vp-p, 1 k Ω)	
<b>Decoding</b>		
<b>Decoding format</b>	H.265+/H.265/H.264+/H.264/MJPEG/MPEG4	
<b>Recording resolution</b>	12 MP/8 MP/7 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p /VGA/4CIF/DCIF/2CIF/CIF/QCIF	
<b>Synchronous playback</b>	16-ch	
<b>Capability</b>	5-ch@8 MP(30 fps)/10-ch@4 MP(30 fps)/20-ch@1080p(30 fps)/40-ch@720p(30 fps)	
<b>Dual-stream recording</b>	Support	
<b>Stream type</b>	Video, Video & Audio	
<b>Audio compression</b>	G.711ulaw/G.711alaw/G.722/G.726/MP2L2	
<b>Network</b>		
<b>Remote connections</b>	128	256
<b>Network protocol</b>	IPv6, HTTP, HTTPS, UPnP, SNMP, NTP, SADP, SMTP, NFS, iSCSI, PPPoE, DDNS	
<b>Network interface</b>	4, RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface	
<b>Interoperability</b>	Profile S client	
<b>Network mode</b>	Net Fault-Tolerance, Load Balance, Multi-address	
<b>RAID</b>		
<b>RAID Type</b>	RAID0, RAID1, RAID5, RAID6, and RAID10 (at least 4 TB for each HDD)	

Auxiliary interface		
<b>Fiber interface</b>	N/A (optional)	4, gigabit Ethernet SFP interface (on extension board)
<b>Serial port</b>	RS-232; RS-485 (full-duplex); Keyboard	
<b>SATA</b>	16 SATA interfaces supporting hot-plug	
<b>Capacity</b>	Up to 10 TB capacity for each disk	
<b>eSATA</b>	1 eSATA interface	
<b>MiniSAS</b>	N/A (2 miniSAS interfaces optional)	2 miniSAS interfaces
<b>Alarm in/out</b>	16/8	48/24 (main board: 16/8; extension board: 32/16)
<b>USB interface</b>	Front panel: 2 × USB 2.0; Rear panel: 2 × USB 3.0	
<b>Extension board</b>	N/A (optional to support)	1; With 4 × gigabit Ethernet SFP interfaces, 8 × RS-485 (full-duplex), 32 alarm inputs, and 16 alarm outputs
General		
<b>Processor</b>	Dual-Core Intel® Core® I3	Quad-Core Intel® Xeon® E3
<b>Memory</b>	8GB	
<b>Power supply</b>	100 to 240 VAC, redundant power supply, 550W	
<b>Fan</b>	Dual ball bearing fan; Speed adjustable; Hot-plug	
<b>Consumption (without HDD)</b>	≤ 140W	
<b>Working temperature</b>	0 °C to 50 °C (32 °F to 122 °F)	
<b>Working humidity</b>	10% to 90%	
<b>Dimension (W × D × H)</b>	442 × 494 × 146 mm (17.4 × 19.4 × 5.7 inch)	447 × 528 × 172 mm (17.6 × 20.8 × 6.8 inch)
<b>Weight (without HDD)</b>	≤ 20 kg (44 lb)	≤ 23 kg (50.7 lb)
Certification		
<b>FCC</b>	SHEM190301156501ATC	
<b>CE</b>	SHEM190301156401ATC	






## Dimension

For iDS-96064NXI-I16(B)

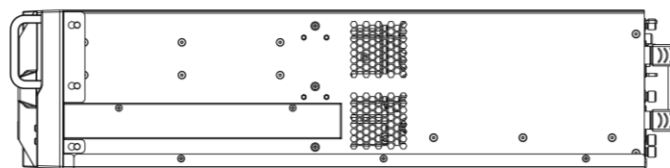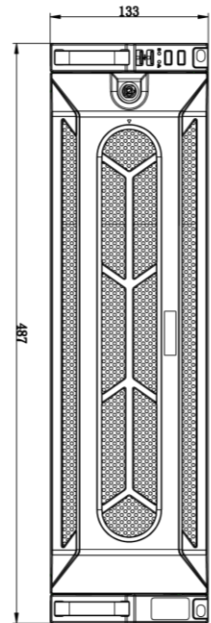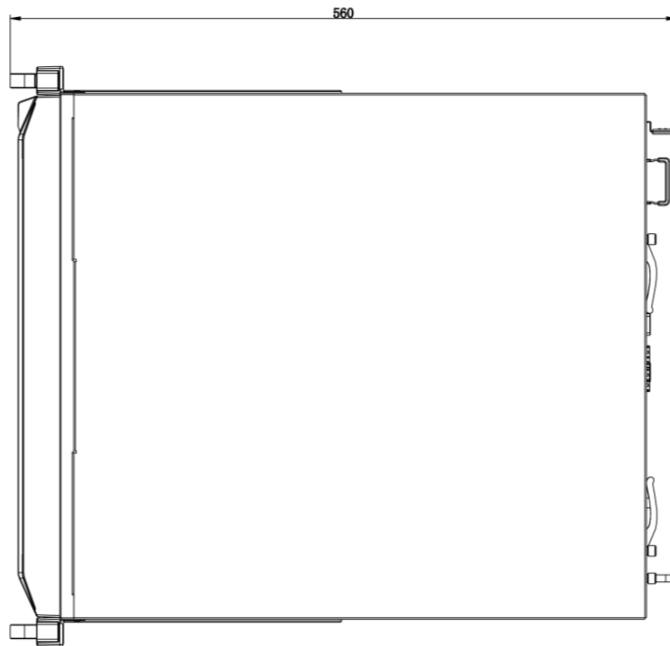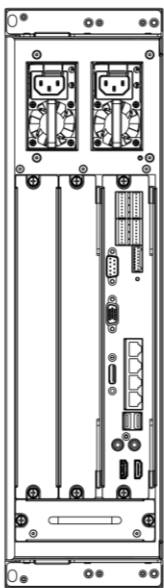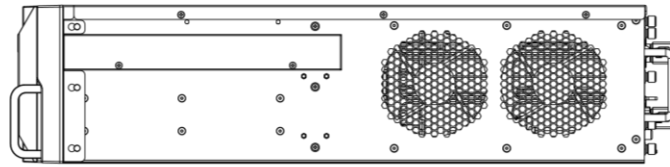


Unit: mm

For iDS-96128NXI-I16(B)

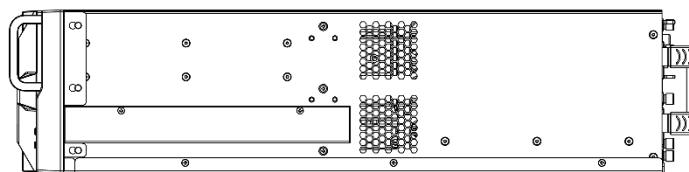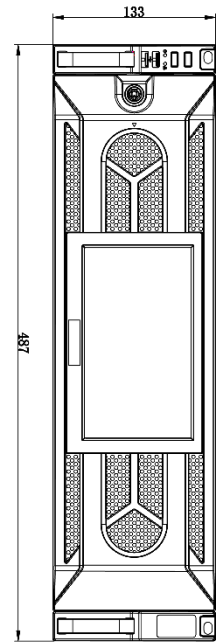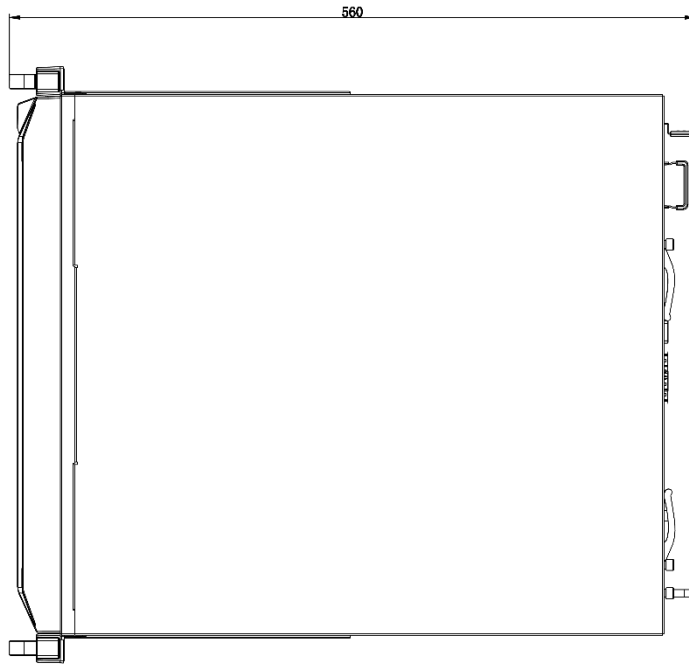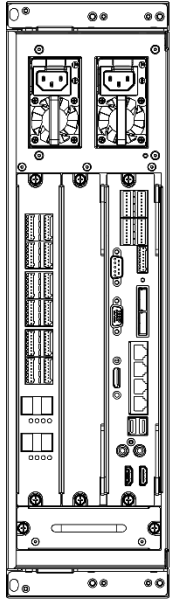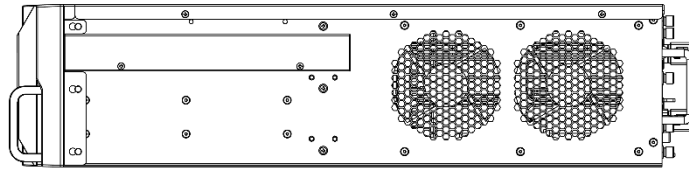

Unit: mm

## Physical Interfaces

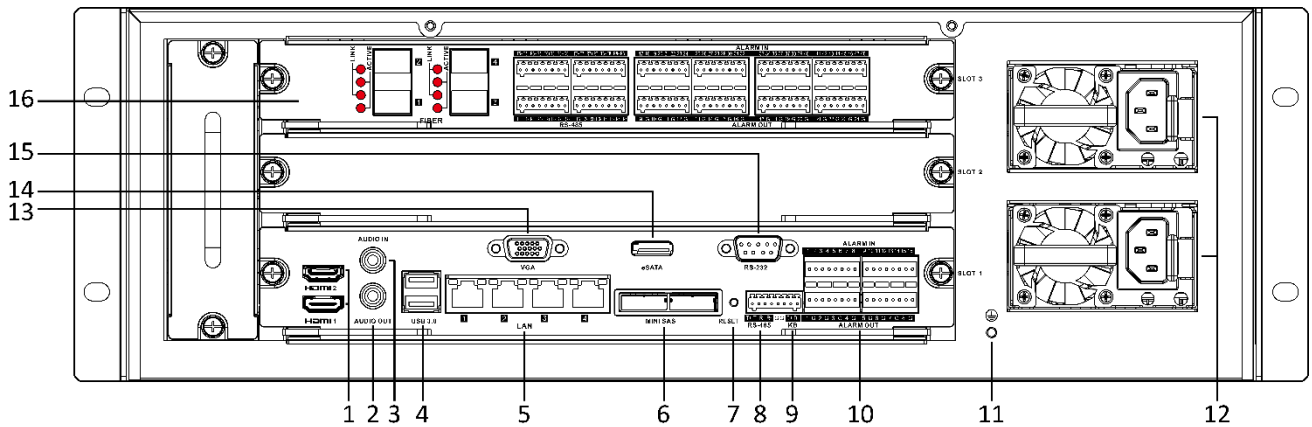

No.	Description	No.	Description
1	HDMI1/HDMI2 Interface	9	Keyboard Interface
2	AUDIO OUT, RCA Connector	10	ALARM IN/OUT
3	AUDIO IN, RCA Connector	11	Ground
4	USB 3.0 Interface	12	100 to 240 VAC Power Supply
5	LAN Network Interface	13	VGA Interface
6	MiniSAS Interface (only available for iDS-96128NXI-I16(B))	14	eSATA Interface
7	Reset Button	15	RS-232 Interface
8	RS-485 Interface	16	Extension Board (only available for iDS-96128NXI-I16(B))



## Available Models

iDS-96064NXI-I16(B), iDS-96128NXI-I16(B)

Distributed by



0401601090424

## HIKVISION®

### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Australia**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision Canada**  
T +1-866-200-6690  
sales.canada@hikvision.com

**Hikvision Thailand**  
T +662-275-9949  
sales.thailand@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
sales.eu@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Brazil**  
T +55 11 3318-0050  
Latam.support@hikvision.com

**Hikvision Turkey**  
T +90 (216)521 7070- 7074  
sales.tr@hikvision.com

**Hikvision Malaysia**  
T +601-7652-2413  
sales.my@hikvision.com

**Hikvision UK & Ireland**  
T +01628-902140  
sales.uk@hikvision.com

**Hikvision South Africa**  
Tel: +27 (10) 0351172  
sale.africa@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-450  
info.fr@hikvision.com

**Hikvision Kazakhstan**  
T +7-727-9730667  
nikia.panfilov@hikvision.ru

**Hikvision Vietnam**  
T +84-974270888  
sales.vt@hikvision.com

**Hikvision UAE**  
T +971-4-4432090  
salesme@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Tashkent**  
T +99-87-1238-9438  
uzb@hikvision.ru

**Hikvision Hong Kong**  
T +852-2151-1761  
info.hk@hikvision.com

**Hikvision Russia**  
T +7-495-669-67-99  
sateru@hikvision.com

**Hikvision Korea**  
T +82-(0)31-731-8817  
sales.korea@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
info.pl@hikvision.com

**Hikvision Indonesia**  
T +62-21-2933759  
Sales.Indonesia@hikvision.com

**Hikvision Colombia**  
sales.colombia@hikvision.com