

Description

The W alarm panel can be connected to an supervised, indoor wired siren.

Installing that WIS100 siren does not affect the use of other Videofied® wireless sirens (indoor and outdoor).

Properties

Power

2 non-polarized wires connected to the W panel

Operating voltage 3.3 V - 4.1 V

Average current 160 mA

Max current 400mA

Output level

100 dBA at 1m

Duration

3 min by default

(15 min max according to local legislation)

Tamper

Wall and cover tamper

Supervision

Short circuit, open circuit and over current detection

Protection marking

IP31 / IK06

Locking

Locking screw

Operating temperature


-10°/+55°C

Maximum relative humidity

75%, non-condensing

Dimensions

144 mm x 76 mm x 44mm (LxWxD)

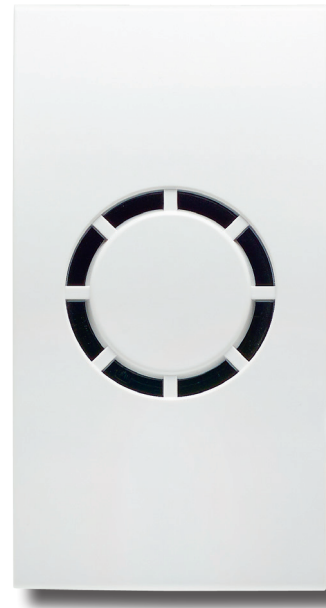

Standards and certifications



EN50131-4 Grade 2

NF&A2P 2 shields

EMEA SALES

23, avenue du Général Leclerc
92340 BOURG-LA-REINE
FRANCE
E-Mail : emeasales@rsivideotech.com

North American Headquarters

1375 Willow Lake Blvd, Suite 103
Vadnais Heights, MN 55110
USA
E-Mail : usasales@rsivideotech.com

