


## Overview

As part of the Paxton10 ecosystem, this connector allows the Paxton10 system to connect to and take control of a defined set of Z-Wave certified end devices. These devices in turn allow Paxton10 to control or dim lighting, switch electrical appliances or monitor a building with sensors.

## Features

- Z-Wave and BLE connectivity
- Easy plug-and-play operation
- Health and fault finding LEDs for visual diagnostics

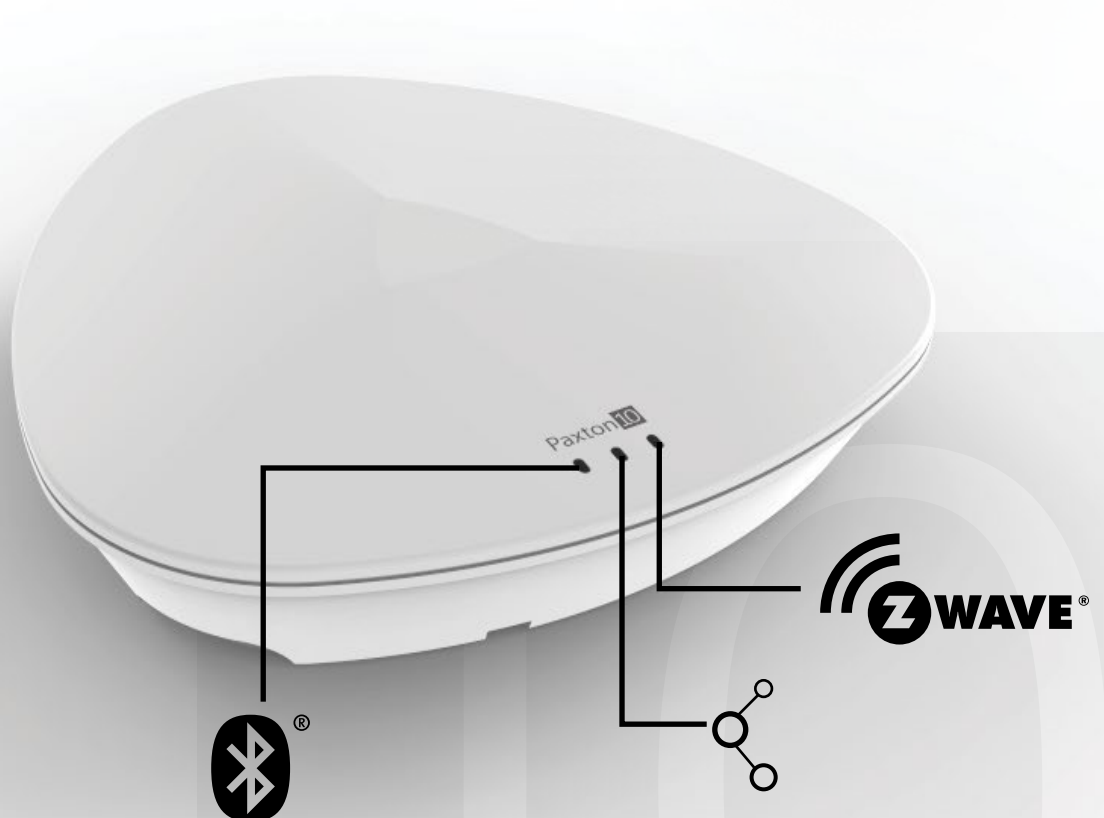



## Electrical

Power consumption	300mA (Max)
Operating voltage	Powered by RS485, 30 Vdc



## Communication

Maximum dataline length	100m/ Connector
Data connection	RS485/Paxton10 protocol
Wireless	Bluetooth® 2.4GHz Z-Wave (868.40 MHz,869.85 MHz)



## Hardware

Dimensions (W x H x D)	164mm x 163mm x 34mm
LED's	Green LED - Health, comms Blue LED - Bluetooth® Red LED - Z-Wave
Warranty	Paxton 5 year



## Environment

Operating temperature	0°C - +45°C
IP Rating	N/A if used outside, this unit must be mounted in a suitable housing
Mounting	Surface only / Backbox mounted

