


# THE DATALINE SERIES

12-00321 / 12-00614

## CCTV 16 way Protection Rack

### Features

Easy Installation  
Low Insertion Loss  
Failsafe Protection

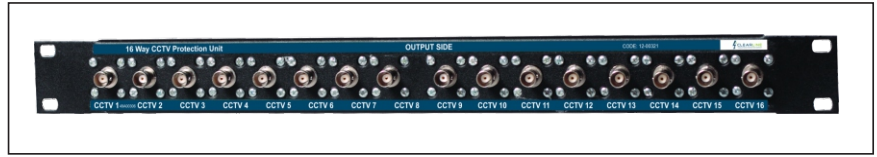


This Rack has 16 units for coaxial protection for high speed data transmission lines. Suitable for CCTV Systems. These devices exhibit negligible insertion loss and are fitted in-line at the equipment connection.

The 19" 1U Rack protection unit fits into a standard 19" cabinet.

### Specifications

Max. operating voltage	+1V DC	+1V DC
Max operating current	0,3A	0,3A
Max. discharge current (Differential mode)	10kA	10kA
Max. discharge current (Common mode)	10kA	10kA
Residual voltage (Differential mode)	Approx.40V	Approx.40V
Residual voltage (Common mode)	Approx. 120V	Approx. 120V
Insertion loss at 10MHz	0,08dB	0,08dB
Connectors	BNC F-F	BNC M-F
Temperature range	-10 C to + 70 C	-10 C to + 70 C
Order code (Each unit)	12-00299	12-00199
Order code (Rack unit)	12-00321	12-00614
Order code (Panel only)	12-00503	

### Dimensions

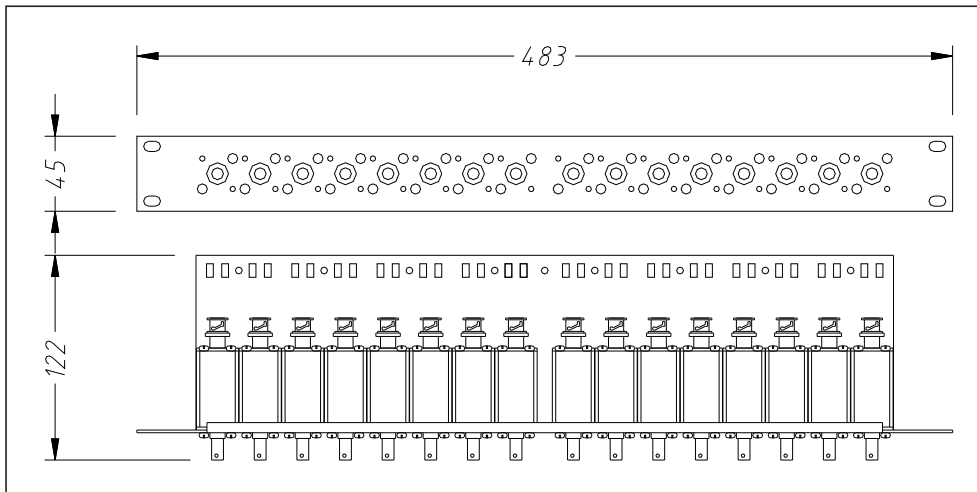

### Designed and Manufactured by:

#### Clearline Protection Systems (Pty) Ltd

385 Roan Crescent Corporate Park North, Old Pta Road,  
Midrand, South Africa  
P.O. Box 5985, Halfway House, 1685  
Tel: +27 (0) 11 848-1100  
Fax: +27 (0) 11 314-3880  
E-mail: info@clearline.co.za  
www.clearline.co.za

