

DH-PFM920I-6U-C

UTP CAT6 Cable



- 305 m (1000 ft)/carton UTP CAT6, power over Ethernet, compatible with one cable
- High-purity oxygen-free copper conductor material
- Customized PVC outer sheath; CE CPR Eca flame retardant class certified
- 10-year warranty

System Overview

Network cables are the most commonly used transmission mediums in generic cabling system. It is usually composed of 4 pairs of twisted wires, and is generally applied in system cabling within 100 meters.

Technical Specification

Conductor

Material	Oxygen free copper (99.97% purity)
Diameter	0.57 mm ± 0.01 mm
American Wire Gauge	23AWG

Insulation

Material	HDPE
Min. Average Thickness	0.21 mm
Diameter	1.0mm±0.1mm
Color (4 Pairs)	Blue, white/blue; orange, white/orange; green, white/green; brown, white/brown

Separator

Material	PE
Specification	Translucent 4.5 × 0.4 mm

Rip Cord

Material	Polyester
Specification	500D

Sheath

Material	PVC
----------	-----

Min. Average Thickness	0.5 mm
Diameter	6.3 mm ± 0.3 mm
Color	White

Electrical

Max. DC Resistance of a Single Conductor	7.5Ω/100 m
Min. Insulation Resistance	5000MΩ·km
Max. DC Resistance Unbalance	2% (pair intra), 4% (pairs inter)
Dielectric Strength	No breakdown with 1KV DC for 1 min

Transmission

Characteristic Impedance	100 ± 15Ω
Near End Cross Talk	≥39.30 dB/100 m@250 MHz
Max. Attenuation	33 dB/100 m@250 MHz
Return Loss	≥17.3 dB/100 m@250 MHz

Mechanical

Tensile Strength	Sheath≥9 MPa, insulation≥16 MPa
Elongation at Break	Sheath≥100%, insulation≥100%
Installation Bending Radius	>8 times of outer cable diameter
Conductor Elongation at Break	≥8%

Environmental

Shrinkage of Insulation	≤5%
Color Migration Resistance of Insulation	No migration

Sheath Tensile Strength and Elongation at Break after Aging	≥6.3 MPa, ≥100%
Low Temperature Bending Test	No cracking after the test
Heat Shock Test	No cracking after the test
Operating Temperature	-20°C to +60°C (-4°F to 140°F)
Installation Temperature	0°C to +50°C (32°F to 122°F)
Storage Temperature and Humidity	-10°C to +40°C (14°F to 104°F), <60% (RH)

Security

Vertical Fire Propagation Test	Comply with IEC 60332-1-2
--------------------------------	---------------------------

Packaging

Cable Length	305.0 m (1000.66 ft) ± 1.5 m (4.92 ft)
Inner Carton Dimensions	416.0 mm × 412.0 mm × 220.0 mm (16.38" × 16.22" × 8.66") (L × W × H)
Packaging Method	305.0 m (1000.66 ft) a carton, one carton with 2 inner cartons
Net Weight	≥11.9 kg (26.24 lb)
Gross Weight	≥12.9 kg (28.44 lb)

Compliance

Executive Standards	ISO/IEC 11801-1-2017, IEC 61156-5-2009
---------------------	--


Certification

Certification	CPR Eca
---------------	---------

Ordering Information

Type	Model	Description
Network Cable	DH-PFM920I-6U-C	UTP CAT6 Cable

Dimensions (mm/inch)

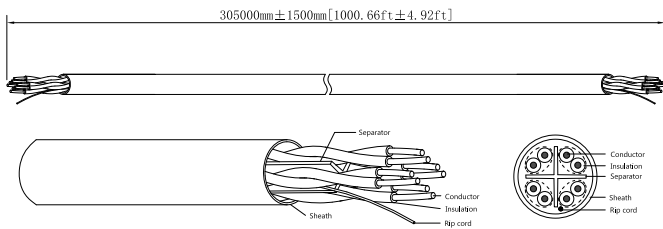

Transmission Characteristics (100 m at 20°C) (328.08 ft at 68°F)

Frequency (MHz)	Phase delay ≤ ns	IL ≤ dB	TCL ≥ dB*	EL TCTL ≥ dB*	NEXT ≥ dB	PS NEXT ≥ dB
1	n/s	n/s	50.0	35.0	n/s	n/s
4	552.0	3.8	44.0	23.0	66.3	63.3
8	547.0	5.4	41.0	16.9	61.8	58.8
10	545.0	6.0	40.0	15.0	60.3	57.3
16	543.0	7.6	38.0	10.9	57.2	54.2
20	542.0	8.5	37.0	9.0	55.8	52.8
25	541.0	9.6	36.0	7.0	54.3	51.3
30*	540.6	10.5	35.2	5.5	53.1	50.1
31.25	540.0	10.7	35.1	n/s	52.9	49.9
62.5	539.0	15.5	32.0	n/s	48.4	45.4
100	538.0	19.9	30.0	n/s	45.3	42.3
200	537.0	29.1	27.0	n/s	40.8	37.8
250	536.0	33.0	26.0	n/s	39.3	36.3
Frequency (MHz)	EL FEXT ≥ dB	PS EL FEXT ≥ dB	RL ≥ dB	Delay skew ≤ ns	Zc(Ω)	
1	n/s	n/s	n/s	n/s	n/s	
4	56.0	53.0	23.0	45.0	100±15	
8	49.9	46.9	24.5			
10	48.0	45.0	25.0			
16	43.9	40.9	25.0			
20	42.0	39.0	25.0			
25	40.0	37.0	24.3			
30*	38.5	35.5	23.8			
31.25	38.1	35.1	23.6			
62.5	32.1	29.1	21.5			
100	28.0	25.0	20.1			
200	22.0	19.0	18.0			
250	20.0	17.0	17.3			

Note:
 Executive standard for the above parameters: ISO/IEC 11801-1-2017
 "n/s"=Not Specified
 "*" = Unless otherwise customer stated the test results default to not shown in test report but comply with standard