





T Series Class 1 Split Core (5A Secondary)

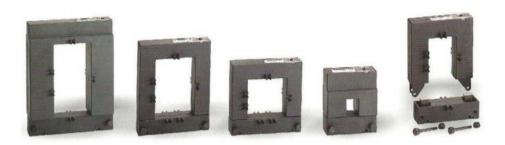

MODEL	RATIO			
RS - 23	100/5A - 250/5A			
RS - 58	300/5A - 600/5A			
RS - 88	800/5A - 1000/5A	5A		
RS - 812	1200/5A - 1500/5A			
RS - 816	2000/5A - 6000/5A			

MODEL	PRIMARY CURRENT A	CLASS 0.5 VA	CLASS 1 VA	CLASS 3 VA	HOLE DIMENSIONS mm	WEIGHT kg
RS-58	300 400 500 600	2 2.5 3.75 5	3.75 3.75 5 7.5	5 7.5 15 20	50.0 X 80.0	0.90
RS-88	800 1000	7.5 10	10 15	20 20	80.0 X 80.0	1.25
RS-812	1200 1500	15 15 20	20 20 30	30 30 45	80.0 X 120	1.25
RS-816	2000 2500 3000 4000 5000 6000	25	30	45	80.0 X 160	4.30



Model	RS-23	RS-58	RS-88	RS-812	RS-846
Α	20	50	80	80	80
В	30	80	80	120	160
С	51	78	108	108	120
D	89	114	144	144	184
Е	110	145	145	185	245
F	34	32	32	32	52
G	47	32	32	32	47
Н	40	32	32	32	52
1	32	33	33	33	38
J	59		-	-	-