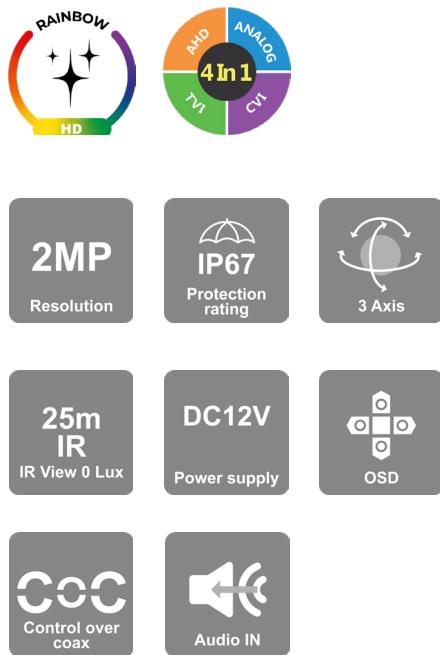**HD RAINBOW SERIES**

Provision-ISR's Rainbow cameras, equipped with CNV (Color Night Vision) technology, yield sharp and superior colors even in poor light conditions, providing visual details that significantly contribute to identifying people or objects.

PROVISION ISR ®
PROTECTING YOUR PRIVACY

BSV-320AR-36

2MP 24/7 FULL-COLOR FIXED LENS BULLET CAMERA

The rainbow camera series is equipped with super light-sensitive sensors that allow the camera to provide a color image throughout the day. When the ambient light is insufficient, the camera will turn on the integral lighting, allowing it to continue providing a full-color image. Featuring 4in1 technology, the camera is ideal for Plug & Play over existing analog infrastructure. With its outstanding performance, reliability, and affordable price, the BSV-320AR-36 camera is the perfect solution for basic installations.

2MP Resolution	**IP67** Protection rating
25m IR IR View 0 Lux	**DC12V** Power supply
Control over coax	Audio IN

3 Axis

OSD

MAIN FEATURES

- 2MP
- RAINBOW
- Pro series
- 1920x1080 Resolution
- IP67
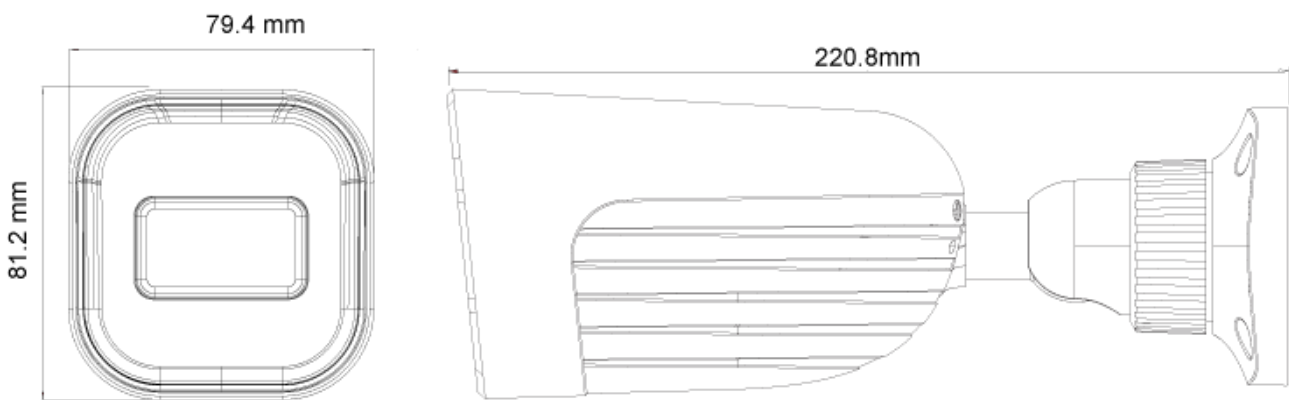- 4 in 1 (AHD/TVI/CVI/CVBS + PAL/NTSC)
- COC support
- Built-in microphone

HD TECHNOLOGY
HIGH DEFINITION THROUGH COAXIAL CABLE

www.provision-isr.com

BSV-320AR-36

PROVISION ISR
PROTECTING YOUR PRIVACY

SPECIFICATIONS

Image Sensor	1/2.8" 2MP Sensor
Image Format	16:9
Effective Pixels	1920 x 1080
Scanning System	Progressive
Resolution	2MP: 1920x1080 AHD/TVI/CVI 1MP: 1280x720 AHD/TVI/CVI CVBS: 1000TVL
FPS	25/30FPS
Min. Illumination	0 lux with LED
D&N	24/7 Full-Color Day Mode
IR LED	N/A
OSD Menu	Available via CoC only
CoC Support	Yes
Day & Night Mode	24/7 Full-Color Day Mode only
Backlight Compensation	BLC/HLC
S/N Ratio	≥52dB (AGC off)
White Balance	Auto/Manual
Noise Reduction	2D-DNR
Video Output	2MP / 1MP (Selected by OSD Menu) AHD/TVI/CVI/CVBS + PAL/NTSC
Privacy Mask	No
D-Effect	N/A
WDR	Digital
Lens (Field Of View)	3.6mm Mega-Pixel Fixed (84.6°)
Power	DC12V/300mA
Audio Connectivity	Built-in Microphone
Operation Temperature	-30°C ~ 50°C, 10% ~ 90% humidity

HD TECHNOLOGY
HIGH DEFINITION THROUGH COAXIAL CABLE

BSV-320AR-36

SPECIFICATIONS

Protection Rate	IP67
Dimensions	172.2*73.4*74.5mm
Net Weight	~475g
Junction Box	PR-JB12IP66 - PR-JB12IP64

DIMENSIONS

79.4 mm

81.2 mm

220.8mm

ACCESSORIES

For I2-Fixed Lens &
BSV-Fixed Lens

I2   BSV

+

IP66   or   IP64

PR-JB12IP66   PR-JB12IP64

+

Wall	Ceiling	Pole	Corner
optional	optional	optional optional	optional optional
PR-WB12 PR-B10EX	PR-CB12 PR-B10EX	PR-B50PB PR-WB12 PR-CB12	PR-B50ECB PR-WB12 PR-CB12

HD TECHNOLOGY
HIGH DEFINITION THROUGH COAXIAL CABLE