

Explorer Series - EP30CF

Multi-Tech Fingerprint Reader

- OSDP & RS485 Biometric Reader
- Multi-tech RFID and Mobile credential support
- Advanced Fingerprint Scanning Technology
- Designed For Advanced Security



OSDP Multi-tech Biometric Reader

The EP30CF reader series stands out as one of the first OSDP multi-tech biometric readers on the market. It fully complies with OSDP version 2.2, utilizing secure channel communication encrypted using AES128 standard. The EP30CF reader supports an advanced fingerprint scanning algorithm and facilitates biometric template transmission over RS485 and OSDP communication protocols. Additionally, it boasts compatibility with over 30 RFID card types, including dual RFID frequencies (125kHz and 13.56MHz), as well as mobile NFC and Bluetooth (Low Energy Credentials).



IP65 Water & Dustproof Protection Level

The Certified IP65 Water and Dustproof rating ensures that the readers are designed to withstand dust, dirt, and sand effectively. They adhere to the IP65 waterproof and dustproof level standards.



Advanced Fingerprint Scanning Technology

Armatura boasts one of the most advanced fingerprint scanning technologies in the industry. It empowers the system to store millions of fingerprint templates securely. The fingerprint data is irreversible and cannot be reconstructed from fingerprint photos, ensuring maximum protection. Furthermore, built-in anti-spoofing technology prevents the authentication of fake fingerprints or images. To add an extra layer of security, the system utilizes the AES256 encryption standard.



Multi-tech & Mobile Credential Ready


The EP30CF offers support for more than 30 different RFID card types, in addition to advanced fingerprint scanning and recognition capabilities. This reader is future-proofed to accommodate Bluetooth and NFC credentials, ensuring the longevity and adaptability of your system.



Designed for Advanced Security

Secure Communication: The EP30CF reader ensures secure communication with the control panel via OSDP (version 2.2) over RS485. It complies with AES-128 standards to protect against interleaving and replay attacks. Additionally, the communication between mobile (NFC/Bluetooth) and the reader complies with AES256 encryption standards for enhanced security.

Secured Data Storage: The utilization of Certified EAL6+ encryption chips elevates data protection performance to the highest security level, ensuring top-notch financial-grade security.



Protection against SPA/DPA/EMA/DEMA Attacks

Engineered to prevent against external malicious attacks. Safeguarding all communications and client data.



Enhanced Protection

The Armatura design team is fully committed to ensuring that the Explorer Series exceeds the highest security expectations.

Explorer Series supports 2 mobile identification modes with the Armatura mobile Application "Armatura ID".



Card Mode

Present your smartphone to the reader like an access card



Remote Mode

Verify on the reader by clicking a button in the Armatura ID app

Key Features

Mobile Credential Capability

The Armatura ID mobile app offers a consistent user experience across iOS and Android platforms. Open doors by presenting your smartphone to the reader or scanning a QR code. Use your phone's Face & TouchID functions for even more secure authentication. It supports both NFC and Bluetooth communication methods, extending mobile access functions to almost all smartphone users.

LEGIC

Bluetooth™


NFC



iOS & Android

Multi-Tech Credential Reading Supported

Supports 125 kHz, 13.56 MHz, and 2.4 GHz frequency credentials. Supports 100+ card types, covering most of the common card formats in the market.

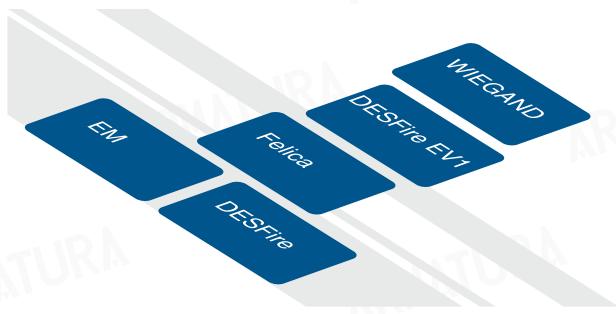

IP65 Water & Dustproof Protection

Certified IP65 Water & Dustproof rating indicates that the readers are designed to withstand dust, dirt, and sand effectively.



Secure Communication

The Open Supervised Device Protocol (OSDP) facilitates communication between the control panel and the reader, ensuring advanced data protection through certified crypto chips adhering to EAL6+ standards. It supports AES128 end-to-end encryption between the control panel and the reader, ensuring that all communications are securely safeguarded.



Dimensions



Specification

Internal Number	EP30CF
Operating Frequency / Standards	125 kHz 13.56 MHz 2.4 GHz Bluetooth®
Functions	RFID, Bluetooth, Fingerprint
Communications & Panel Connection	OSDP (v2.2) via RS485
RFID Reading Distance	13.56MHz & 125kHz: Up to 2.3"/60 mm (depending on environment and transponder) Up to 393.7"/ 10m with a Bluetooth Smartphone (configurable distances on each reader)
Data Protection	AES128 (Secured Communication between Reader & Controller) Secure Data Storage in EAL6+ Certified Crypto Chip
Fingerprint Algorithm	AMTFingerprint v10.0
Visual Indicator	RGB LEDs (Configurable By 'Armatura Connect' Mobile APP)
Audio Indicator	Internal buzzer with adjustable intensity (Configurable By 'Armatura Connect' Mobile APP)
Power Requirement / Power Supply	9 VDC to 24 VDC
Operating Temperature	-4°F - 131°F / -20°C to 55°C
Dimensions (L*H*D)	With Metal Case: 2.59" L x 5.28" H x 1.54" D (65.9 x 134.2 x 39.1mm) Without Metal Case: 2.57" L x 5.26" H x 1.54" D (65.2 x 133.7 x 39.1mm)
Tamper Switch	Magnetic tamper detection system
Certifications	CE, FCC, UL294(Coming Soon), RoHs3.0, WEEE
Mounting	Flush Mount
Protection / Resistance	Weather & Dust Proof Protection Rating compliant with IP65

Frequency	Classification	Card Module Abbreviation	[DF]	[SFMH]	[NO]	[NP]	[NI]	[NPL]	[NIH]
	Compatible Readers	EP10C/ EP20CK/ EP20CQ/ EP20CKQ/ EP30 Series	EP10C/ EP20C/ EP20CK/ EP20CQ/ EP20CKQ/ EP30 Series	EP10C	EP10C	EP10C/ EP20CQ/ EP20CKQ	EP10C	EP10C	EP10C
13.56MHz	ISO14443A	LEGIC Advant		✓	✓1)	✓1)	✓1)		✓1)
		MIFARE Classic, Mini S50,S70,S50	✓4)	✓	✓	✓	✓		✓
		MIFARE Classic EV1	✓4)	✓2)	✓2)	✓2)	✓2)		✓2)
		MIFARE DESFire Light		✓11)	✓11)	✓11)	✓11)		✓11)
		MIFARE DESFire EV1	✓4)	✓	✓	✓	✓		✓
		MIFARE DESFire EV2	✓4)	✓11)	✓11)	✓11)	✓11)		✓11)
		MIFARE Plus S, X		✓	✓	✓	✓		✓
		MIFARE Pro X			✓3)	✓3)	✓3)		✓3)
		MIFARE Smart MX		✓3)	✓3)	✓3)	✓3)		✓3)
		MIFARE Ultralight		✓	✓	✓	✓		✓
		MIFARE Ultralight C		✓	✓	✓	✓		✓
		MIFARE Ultralight EV1		✓2)	✓2)	✓2)	✓2)		✓2)
		NFC (NTAG2xx)	✓		✓	✓	✓		✓
		PayPass		✓3)	✓3)	✓3)	✓3)		✓3)
		SLE44R35		✓3)	✓3)	✓3)	✓3)		✓3)
	ISO14443B	SLE66Rx (my-d move)		✓3)	✓3)	✓3)	✓3)		✓3)
		Topaz			✓	✓	✓		✓
		HID iCLASS SEOS					✓20)		✓20)
		NFC(HCE & NTAG2xx)	✓	✓	✓	✓	✓		✓
		Calypso	✓3)	✓3)	✓3)	✓3)	✓3)		✓3)
		Calypso Innovatron protocol	✓3)	✓3)	✓3)	✓3)	✓3)		✓3)
		CEPAS	✓3)	✓3)	✓3)	✓3)	✓3)		✓3)
		HID iCLASS	✓1)	✓1)	✓1)	✓1)	✓10)		✓10)
		CTS	✓	✓	✓	✓	✓		✓10)
		Moneo	✓3)	✓3)	✓3)	✓3)	✓3)		✓10)
		Pico Pass	✓4)	✓4)	✓4)	✓4)	✓4)		✓4)
		SRI4K, SRIX4K	✓	✓	✓	✓	✓		✓
		SRI512, SRT512	✓	✓	✓	✓	✓		✓
ISO15693	ISO18092/ ECMA-340	Sony FeliCa		✓5)	✓5)	✓5)	✓5)		✓5)
		EM4x33		✓3)	✓3)	✓3)	✓3)		✓3)
		EM4x35		✓3)	✓3)	✓3)	✓3)		✓3)
		HID iCLASS	✓1)	✓1)	✓1)	✓1)	✓10)		✓10)
		HID iCLASS SE/ SR/ Elite	✓1)	✓1)	✓1)	✓1)	✓10)		✓10)
		iCODE SLI		✓	✓	✓	✓		✓10)
		LEGIC Advant		✓1)	✓1)	✓1)	✓1)		✓1)
		M24LR16/64			✓	✓	✓		✓
		MB89R118/119			MT2, MT3, Nano, Palon, Wall, Panel	MT2, MT3, Nano, Palon, Wall, Panel	MT2, MT3, Nano, Palon, Wall, Panel		MT2, MT3, Nano, Palon, Wall, Panel
		SRF55Vxx (my-d vicinity)		✓3)	✓3)	✓3)	✓3)		✓3)
		Tag-it		✓	✓	✓	✓		✓
		Pico Pass			✓4)	✓4)	✓4)		✓4)
		LEGIC Prime		✓					
		CPU Card							

*To be released

Frequency	Classification	Card Module Abbreviation	[DF]	[SFMH]	[NO]	[NP]	[NI]	[NPL]	[NIH]
		Compatible Readers	EP10C/ EP20CK/ EP20CQ/ EP20CKQ/ EP30 Series	EP10C/ EP20C/ EP20CK/ EP20CC/ EP20CKQ/ EP30 Series	EP10C	EP10C/	EP10C/ EP20CQ/ EP20CKQ	EP10C	EP10C
125kHz	AWID Cardax CASI-RUSCO Cotag Deister EM4100, 4102, 4200 EM4050, 4150, 4450, 4550 EM4305 FDX-B, EM4105 Ultra Prox G-Prox HID DuoProx II (1336) HID ISO Prox II (1386) HID Micro Prox II (1391) HID Prox III (1346) HID Prox HID Prox II (1326) HITAG 1, 2, S ICT IDTECK Indala ioProx ISONAS Keri Miro Nedap Nexwatch PAC Pyramid Q5 T5557, T5567, T5577 TITAN (EM4050) UNIQUE ZODIAC Globally Available				√	√	√	√	
					√	√	√	√	
					√	√	√	√	
					√(6)	√(6)	√(6)	√(6)	
			√		√(7)	√(7)	√(7)	√(7)	
					√	√	√	√	
					√(14)	√(14)	√(14)	√(14)	
					√(15)	√(15)	√(15)	√(15)	
					√(15)	√(15)	√(15)	√(15)	
					√(6)	√(6)	√(6)	√(6)	
						√	√	√	
						√	√	√	
						√	√	√	
						√	√	√	
						√	√	√	
						√	√	√	
						√(9)	√(9)	√(9)	
						√(8)	√(8)	√(8)	
						√	√	√	
						√	√	√	
						√(6)	√(6)	√(6)	
						√	√	√	
						√	√	√	
						√(8)	√(8)	√(8)	
						√	√	√	
						√	√	√	
						√	√	√	
						√	√	√	
						√	√	√	
						√	√	√	
		Globally Available		√				√	√
	Availability	Globally Available Except for U.S., E.U., Japan, Australia, Canada, U.K., Albania, Iceland, Liechtenstein, Monaco, North Macedonia, Norway, San Marino, Serbia, Switzerland, Turkey, and the United Kingdom	√		√	√	√		

1) UID only

2) Read /write enhanced security features on request

3) Read /write in direct chip command mode

4) UID only, read/write on request

5) UID + read /write public area

6) Hash value only

7) Only emulation of 4100, 4102

8) On request

9) Without encryption

10) UID+PAC (CSN & Facility Code), read /write on request

11) In preparation

13) EV2/EV3 supported as part of the EV1 upward compatibility

14) From FW V4.05

15) 134.2 kHz only

20) PAC (CSN & Facility Code), read /write on request

*To be released



Address: 190 Bluegrass Valley Parkway, Alpharetta, GA 30005

Phone: +1 (470) 816-1970

Email: sales@armatura.us

Website: www.armatura.us

Copyright © 2023 Armatura LLC @ ARMATURA, the ARMATURA logo, are trademarks of Armatura

