

## DS-2CE19H0T-AIT3ZF(C) 5 MP Motorized Varifocal Bullet Camera



- High quality imaging with 5 MP, 2560 × 1944 resolution
- 2.7 mm to 13.5 mm motorized varifocal lens
- Up to 40 m IR distance for bright night imaging
- One port for four switchable signals (TVI/AHD/CVI/CVBS)
- Water and dust resistant (IP67)

## ▪ Specification


| Camera                   |  |
|--------------------------|--|
| Image Sensor             | 5 MP CMOS  |
| Signal System            | PAL/NTSC   |
| Resolution               | 2560 (H) × 1944 (V)  |
| Frame Rate               | TVI: 5 M @ 20 fps, 4 M @ 30 fps, 4 M @ 25 fps, 1080p @ 30 fps, 1080p @ 25 fps<br>AHD: 5 M @ 20 fps, 4 M @ 30 fps, 4 M @ 25fps<br>CVI: 4 M @ 30 fps, 4 M @ 25 fps<br>CVBS: PAL/NTSC |
| Min. Illumination        | 0.01 Lux @ (F1.6, AGC ON), 0 Lux with IR   |
| Shutter Time             | PAL: 1/25 s to 1/50,000 s; NTSC: 1/30 s to 1/50,000 s  |
| Lens                     | 2.7 mm to 13.5 mm motorized varifocal lens   |
| Field of View            | horizontal FOV: 95° to 26°, vertical FOV: 72° to 20°, diagonal FOV: 126° to 33°  |
| Lens Mount               | Ø14  |
| Day & Night              | IR Cut Filter  |
| WDR (Wide Dynamic Range) | Digital WDR  |
| Angle Adjustment         | Pan: 0° to 360°, Tilt: 0° to 90°, Rotation: 0° to 360°   |
| Image                    |  |
| Day/Night Mode           | Auto/Color/BW (Black and White)  |
| Image Mode               | STD/HIGH-SAT   |
| AGC                      | Yes  |
| White Balance            | Auto/Manual  |
| AE (Auto Exposure) Mode  | DWDR, BLC, HLC, Global   |
| Noise Reduction          | 2D DNR   |
| Language                 | English  |
| Function                 | Brightness, Smart IR, Sharpness  |
| Interface                |  |
| Video Output             | Switchable TVI/AHD/CVI/CVBS  |
| General                  |  |
| IR Range                 | Up to 40 m   |
| Operating Conditions     | -40°C to 60°C (-40°F to 140°F), Humidity: 90% or less (non-condensing)   |
| Power Supply             | 12 VDC±15%, 24 VAC±15%   |
| Consumption              | Max 8.8 W  |
| Protection Level         | IP67   |
| Material                 | Front cover: Metal, Main body: Plastic   |
| Communication            | HIKVISION-C  |
| Dimension                | 84.5 mm × 92 mm × 255.1 mm (3.33" × 3.62" × 10.04")  |
| Weight                   | Approx. 682 g (1.50 lb.)   |

\*5 MP Motorized Varifocal Bullet Camera

▪ **Available Model**

DS-2CE19H0T-AIT3ZF(2.7-13.5mm)(C)

▪ **Dimension**

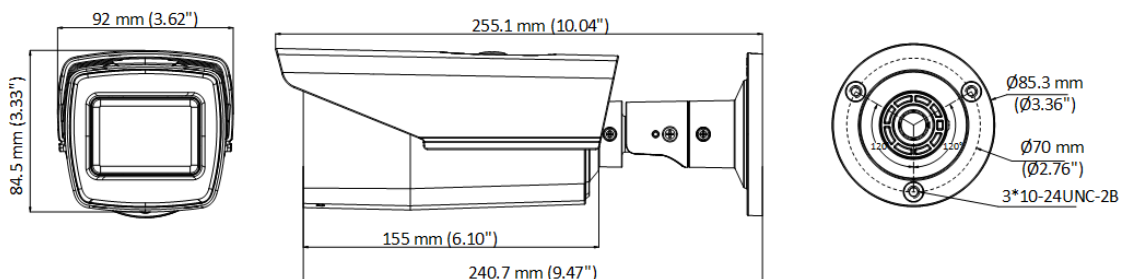

▪ **Accessory**

▪ **Optional**

| DS-1276ZJ-SUS<br>Corner Mount   | DS-1275ZJ-SUS<br>Vertical Pole Mount  | DS-1280ZJ-S<br>Junction Box   |
|---|---|---|
|  |  |  |
|  |  |   |

**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com



Follow us on social media to get the latest product and solution information.

