

DVR-E16G-B 16-ch 1080p Lite 1U H.265 eSSD DVR

Key Feature

- Powered by eSSD technology
- Deep learning based human and vehicle targets classification of Motion Detection 2.0
- Scene-adaptive bitrate control video compression
- Up to 1080p Lite@15 fps encoding capability
- Low power consumption
- Audio via coaxial cable















Built-In SSD

- Minimalist eSSD design brings low power consumption
- Integrated storage design provides the plug-and-play device use

Easy Installation

- Mini size design saves installation space
- Anti-vibration design and light weight satisfy more installation conditions

Compression and Recording

- Scene-adaptive bitrate control technology would precisely allocate videos in eSSD according to the actual scene
- Full channel recording at up to 2 MP Lite resolution

Smart Function

- Deep learning-based motion detection 2.0
- Smart search for efficient playback



Specification

Motion Detection 2.0			
Human/Vehicle Analysis	Deep learning-based motion detection 2.0 is enabled by default for all analog channels,		
	it can classify human and vehicle, and extremely reduce false alarms caused by objects		
	like leaves and lights;		
	Quick search by object or event type is supported;		
Recording			
Video Compression	H.265 Pro/H.265		
Encoding Resolution	1080p Lite/720p/720p Lite/WD1/4CIF/CIF/QVGA		
Frame Rate	Main stream:		
	1080p Lite/720p/WD1/4CIF@25 fps (P)/30 fps (N)		
	Note:		
	1080p Lite/720p is 15 fps by default		
	Sub-stream:		
	CIF/QVGA@25 fps (P)/31 fps (N)		
Video Bitrate	According to the actual scene, scene-adaptive bitrate control technology would		
	automatically allocates appropriate bitrate to ensure the stability of recording period.		
	Video, Video & Audio		
Stream Type	Note: In order to protect privacy, the device will only record video (without audio) by		
Stream type	default. If you want to record audio, you shall manually enable audio recording. For		
	operation details, refer to the user manual.		
Audio Compression	G.711u		
Audio Bitrate	64 Kbps		
Video and Audio			
	2-ch		
IP Video Input	Up to 5 MP resolution		
	Support H.265+/H.265 IP cameras		
Analog Video Input	16-ch		
	BNC interface (1.0 Vp-p, 75 Ω), supporting coaxitron connection		
HDTVI Input	1080p25, 1080p30, 720p25, 720p30		
AHD Input	1080p25, 1080p30, 720p25, 720p30		
HDCVI Input	1080p25, 1080p30, 720p25, 720p30		
CVBS Input	Support		
HDMI Output	1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz		
VGA Output	1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz		




Video Output Mode	HDMI/VGA simultaneous output			
Audio Input	16-ch via coaxial cable			
Audio Output	1-ch via HDMI			
Synchronous Playback	16-ch			
Network				
Total Bandwidth	96 Mbps			
	Incoming bandwidth: 8 Mbps			
Network Protocol	TCP/IP, DHCP, HiLookVision, DNS, DDNS, NTP, SADP, SMTP, NFS, UPnP™, HTTPS			
Remote Connection	128			
Network Interface	1, RJ45 10/100 Mbps self-adaptive Ethernet interface			
Auxiliary Interface				
	Built-in 1024 GB eSSD (960 GB available)			
Capacity	Note:			
	The device can store about 2 weeks videos for 16-ch analog cameras (default			
	parameters), this estimation is for reference only.			
Alarm In/Out	N/A			
USB Interface	Rear panel: 2 × USB 2.0			
General				
Power Supply	12 VDC, 1 A			
Consumption	≤ 9.5 W (with eSSD)			
Working Temperature	-10 °C to 45 °C (14 °F to 113 °F)			
Working Humidity	10% to 90%			
Dimension (W × D × H)	235 × 146.6 × 46.6 mm (9.25 × 5.77 × 1.83 inch)			
Weight	≤ 0.5 kg (with eSSD, 1.1 lb.)			
	•			

Note:

Analog and IP signal input types are not configurable, and analog channel cannot be disabled to increase the maximum accessible number of network cameras.



Physical Interface

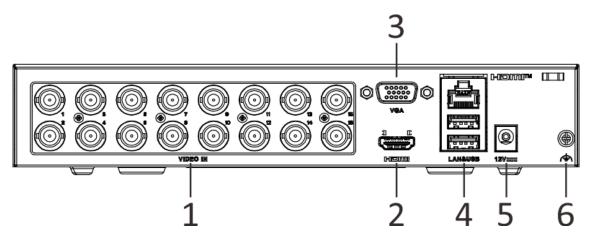

No.	Description	No.	Description
1	1 Video and coaxial audio in		LAN network interface and USB interface
2	HDMI interface	5	Power supply
3	VGA interface	6	GND

Available Model

DVR-E16G-B



Headquarters

No.555 Qianmo Road, Binjiang District, Hangzhou 310051, China T +86-571-8807-5998 Technical Support: support@hikvision.com











