

RADWIN Subscriber Units, SU PRO Model

Subscriber Unit - Data Sheet (RW5000/SU-Pro/5HC5/F54/UNI/INT)



RW-5HC5-9P54

Product Description

RW-5HC5-9P54 is SU PRO Model, subscriber unit that delivers up to 500 Mbps net aggregate throughput and supports SLA (CIR) or Best-Effort service level.

Can be used in a P2P configuration

SU PRO supports 4.9 to 6 GHz and complies with Universal & UBR regulations.

The unit includes an integrated 19dBi antenna.


Product Highlights

- Up to 500 Mbps net aggregated throughput
- Long range - Up to 40 km / 25 miles
- Guaranteed Service Level Agreement based on CIR or Best Effort Service level
- 22dBi antenna gain
- Short and constant latency
- Advanced MIMO, OFDM and Antenna Diversity
- Robust and reliable operation in harsh environmental conditions including obstructed line-of-sight scenarios
- IP-67
- Simplified installation using a Smartphone app.

Product Specifications:

Configuration					
Architecture	Outdoor Unit with an integrated antenna				
PoE to ODU Interface	Outdoor CAT-5e; Maximum cable length: 100m for 10/100BaseT and 75m for 1000BaseT				
Radio					
Max Capacity	500 Mbps net aggregate throughput (up to 250 Mbps per direction)				
Range	Up to 40 km / 25 miles				
Channel Bandwidth	Configurable: 10, 20, 40, 80 MHz (for the default band)				
Modulation	MIMO-OFDM (BPSK/QPSK/16QAM/64QAM/256QAM)				
Adaptive Modulation & Coding	Supported				
Automatic Channel Selection	Supported upon power up				
DFS	Not Supported				
Diversity	Supported				
Max Tx Power	26 dBm				
Duplex Technology	TDD				
Error Correction	FEC k = 1/2, 2/3, 3/4, 5/6				
Encryption	AES 128				
Support Indoor units	RADWIN PoE devices (RW-9921-101X)				
Uplink / Downlink Allocation	Configurable: Symmetric or Asymmetric				
Layer 2	HUB Mode				
QoS	Packet classification to 4 priority queues according to 802.1P or Diffserv				
VLAN Support	802.1Q, QinQ, 4094 VLANs				
ODU Management	IPv4/IPv6 dual-stack; SNMPv1, SNMPv3; HTTP/HTTPS using web browser				
802.1x	Supported				
Option 82	Supported				
Non PPPoE filtering	Supported				
DHCP Filter	Supported				
IGMP snooping	Supported				
Nomadic subscribers	Supported				
RADIUS Authorization	Supported				
RADIUS User authentication	Supported				
Syslog	Supported				
Supported Bands					
Band	CBW 10MHz [GHz]	CBW 20MHz [GHz]	CBW 40MHz [GHz]	CBW 80MHz [GHz]	Radio Compliance
5.4 GHz Universal (default)	5.470-5.725	5.465-5.730	5.455-5.740	5.455-5.760	Universal
4.9 GHz Universal	4.900-4.995	4.900-4.995	4.900-4.995	4.900-4.995	Universal
6.0 GHz Universal	5.695-6.055	5.690-6.060	5.680-6.070	5.680-6.090	Universal
5.9 GHz Universal	5.725-5.955	5.720-5.960	5.710-5.970	5.710-5.990	Universal
5.9 GHz Universal	5.725-5.850	5.725-5.850	5.725-5.850	5.725-5.850	Universal
5.1 GHz Universal	5.145-5.340	5.140-5.345	5.130-5.355	5.130-5.375	Universal
5.1 GHz UBR	5.125-5.880	5.125-5.880	5.125-5.880	5.125-5.880	Universal
Mechanical					
ODU Dimensions	32.5(w) x 32.5(h) x 6.4(d) cm				
ODU Weight	2 kg / 4.41 lbs				
Power					
Power Feeding	Power provided over ODU-IDU cable				
Power Consumption	<13W				
Environmental					
Operating Temperatures	-35°C to 60°C / -31°F to 140°F				
Humidity	100% condensing, IP67 (totally protected against dust and against immersion in water up to 1m)				
Safety					
US/CAN (cTUVus)	UL 60950-1, UL 60950-22, CAN/CSA C22.2 60950-1, CAN/CSA C22.2 60950-22				
CE/IEC	EN/IEC 60950-1, EN/IEC 60950-22				
EMC					
FCC	47 CFR, Part15, Subpart B, Class B				
ETSI	EN 300 386, EN 301 489-1, EN 301 489-4				
CAN/CSA-CEI/IEC	CISPR 22-2010 Class B				

Integrated Antenna	
Gain	21 dBi
VSWR	2.0 : 1
3 dB Azimuth Beamwidth	10 Deg. (typ)
Polarization	Dual Linear (Vertical and Horizontal)
Sidelobes Level	-12 dB(typ)
Cross Polarization	-25dB (typ)
F/B Ratio	-25 dB
Port To Port Isolation	30 dB (typ)
Lightning Protection	DC Grounded

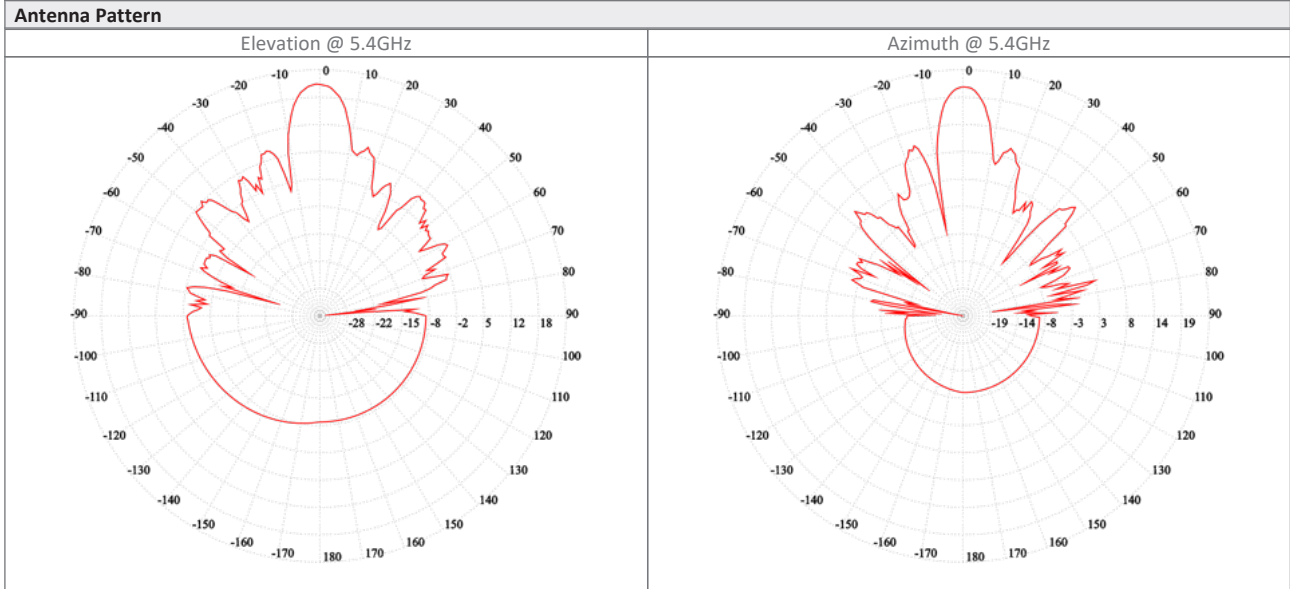

Ordering Info

Part Number: RW-5HC5-9P54

Description: RADWIN SU PRO ODU, with an integrated antenna, supporting multi frequency bands at 5.x GHz, factory default 5.4 GHz Universal.

Datasheet information can be changed by manufacturer without prior notice